



Leveling Mounts – Conical Type

www.vibrationmounts.com Phone: 516.328.3662 Fax: 516.328.3365

- **MATERIAL:** Bolt – DIN 976
Nuts – DIN 934 Washer – DIN 9021
Isolator – Natural Rubber (Ozone-Resistant)

- ISOLATES IMPACTS & STRUCTURAL NOISE
- PREVENTS MACHINE PIVOTING

New



Metric

With Threaded Leveling Bolt

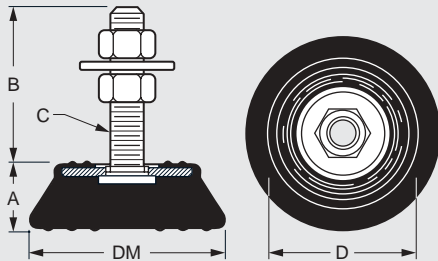


FIG. 1

With Removable Leveling Bolt





FIG. 2

PERFORMANCE GRAPH

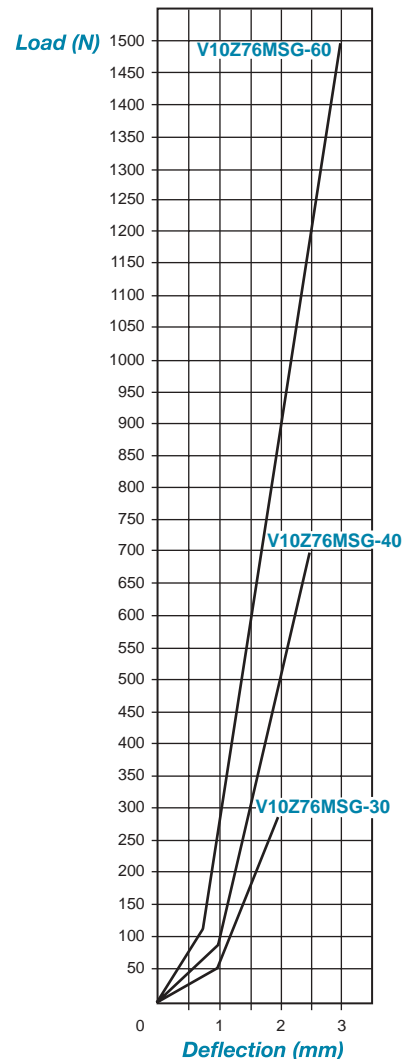

Catalog Number	Fig. No.	A mm (in.)	B mm (in.)	D mm (in.)	DM mm (in.)	C
V10Z76MSG-30	1	12 (.472)	18 (.709)	30 (1.181)	40 (1.575)	M8/M10
V10Z76MSG-40		17 (.669)	45 (1.772)	38 (1.496)	50 (1.979)	M8
V10Z76MSG-60	2	20 (.787)	80 (3.150)	52 (2.047)	58 (2.284)	M10

Catalog Number	Maximum		Minimum		Admissible Temporary Overload %
	Load N (lb.)	Deflection mm (in.)	Load N (lb.)	Deflection mm (in.)	
V10Z76MSG-30	250 (56)	2 (.079)	50 (11)	1 (.039)	100
V10Z76MSG-40	450 (101)	2.5 (.089)	80 (18)		
V10Z76MSG-60	1500 (337)	3 (.118)	250 (56)	1 (.039)	50

SECTION 3