




# Spring Mounts – Single Hole Type


www.vibrationmounts.com Phone: 516.328.3662 Fax: 516.328.3365

• **MATERIAL:** Mounting Plates – Steel, Cadmium Plated  
Springs – Spring Steel Wire

• **ALL METAL**

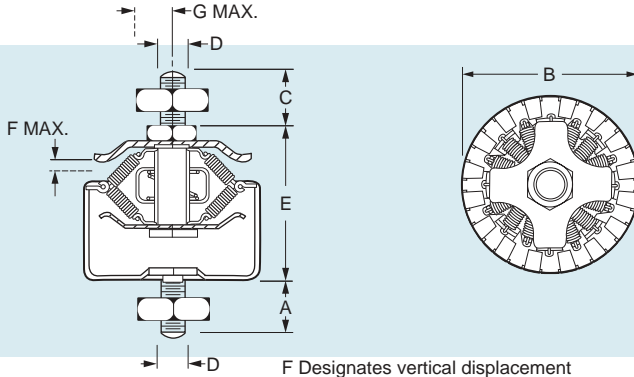

F Designates vertical displacement  
G Designates radial displacement

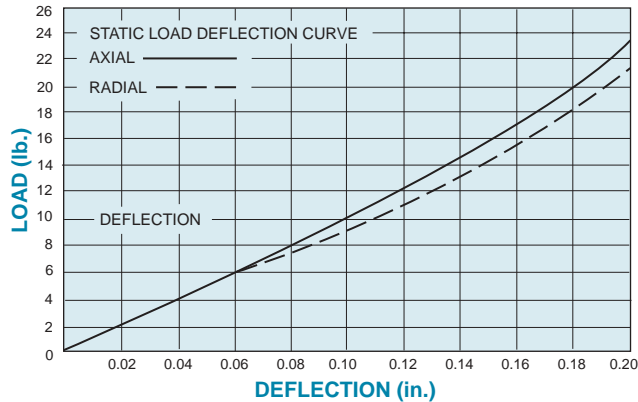

TEMPERATURE RANGE: -76°F to +302°F  
-60°C to +150°C

Catalog Number	Nominal Load		Weight		Dimensions								
	lb.	kgf	oz.	kg		in.	mm		in.	mm			
<b>LIGHT-DUTY</b>													
V10C18-LF237001	1	0.45	.93	0.026	A	3/8	9.53	E	1-3/32	27.78			
V10C18-LF237102	2	0.91			B	1-19/64	32.94		F	5/32	3.97		
V10C18-LF237203	3	1.36			C	3/8	9.53		G	1/8	3.18		
V10C18-LF237304	4	1.81			D	#4 BA	4						
<b>MEDIUM-DUTY</b>													
V10C18-MF237402	2	0.91	2.71	0.076	A	1/2	12.7	E	1-21/64	33.73			
V10C18-MF237504	4	1.81			B	1-7/8	47.63				F	3/16	4.76
V10C18-MF237606	6	2.72			C	1/2	12.7				G	3/16	4.76
V10C18-MF237708	8	3.63			D	#1/4 BSF	6						
V10C18-MF237810	10	4.54											
V10C18-MF237912	12	5.44											
<b>HEAVY-DUTY</b>													
V10C18-HF238210	10	4.54	6.47	0.182	A	11/16	17.46	E	1-51/64	45.64			
V10C18-HF238315	15	6.80			B	2-9/16	61.91				F	1/4	6.35
V10C18-HF238420	20	9.07			C	27/32	21.43				G	3/16	4.76
V10C18-HF238525	25	11.34			D	#3/8 BSF	10						
V10C18-HF238630	30	13.61											
V10C18-HF371235	35	15.88											

**NOTE:** Curves shown for mounts with a nominal load rating of 6 pounds (2.7 kgf).

Deflection curve for mounts with other load ratings may be drawn by shifting the curve shown to pass through a point defined by the intersection of the mounts nominal load (pounds) with a standard deflection of .06 inches (1.5 mm).