


Base Mounts – Dome Type

www.vibrationmounts.com Phone: 516.328.3662 Fax: 516.328.3365

• **MATERIAL:** Isolator – Neoprene
Insert & Base – Steel, Trivalent Chromium Plated

• **FOR LOADS OF 2.5 TO 8 kgf (5.5 TO 17.6 lbf)**

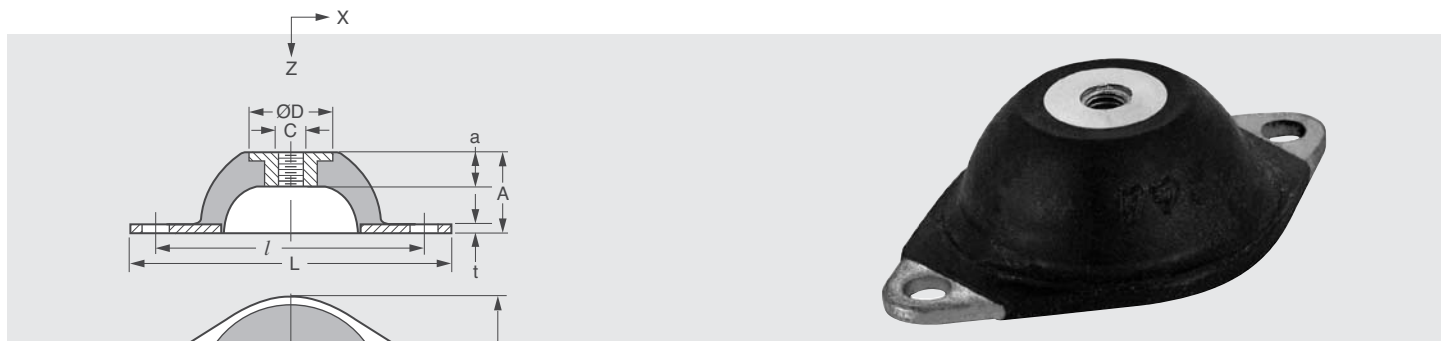

The projections shown are per ISO convention.

Metric

APPLICATIONS

- OFFICE MACHINES
- AIR CONDITIONERS
- SMALL GENERATORS

FEATURES:

- Superior horizontal stability
- Neoprene is resistant to combustion and ozone

Catalog Number	A	D	DM	L	l	C	d	a
V11Z75MKQ27	11 (.43)	14 (.55)	27 (1.06)	43 (1.69)	36 (1.42)	M4	3.6 (.14)	4.2 (.17)
V11Z75MKQ38	15 (.59)	19 (.75)	38 (1.50)	60 (2.36)	50 (1.97)	M6	4.8 (.19)	6 (.24)

Catalog Number	t	Load		Spring Rate in Z dir. Kz kgf/mm (lb./in.)	Stiffness Ratio Kx/Kz
		Support kgf (lbf)	Max. kgf (lbf)		
V11Z75MKQ27	1.6 (.06)	2.5 (5.5)	3.5 (7.7)	2.1 (117.6)	0.5
V11Z75MKQ38		6 (13.2)	8 (17.6)	3.2 (179.2)	

NOTE: Dimensions in () are inch.