





# Platemounts – To 5 kgf

www.vibrationmounts.com Phone: 516.328.3662 Fax: 516.328.3365

- **MATERIAL:** Isolator – Neoprene  
Base – Steel, Trivalent Chromium Plated

- **FOR LOADS OF 2 TO 5 kgf (4.4 TO 11 lbf)**

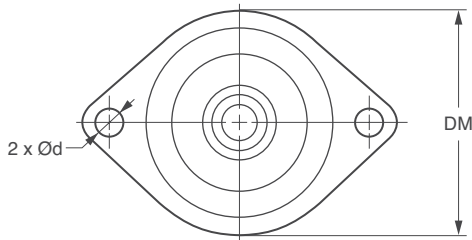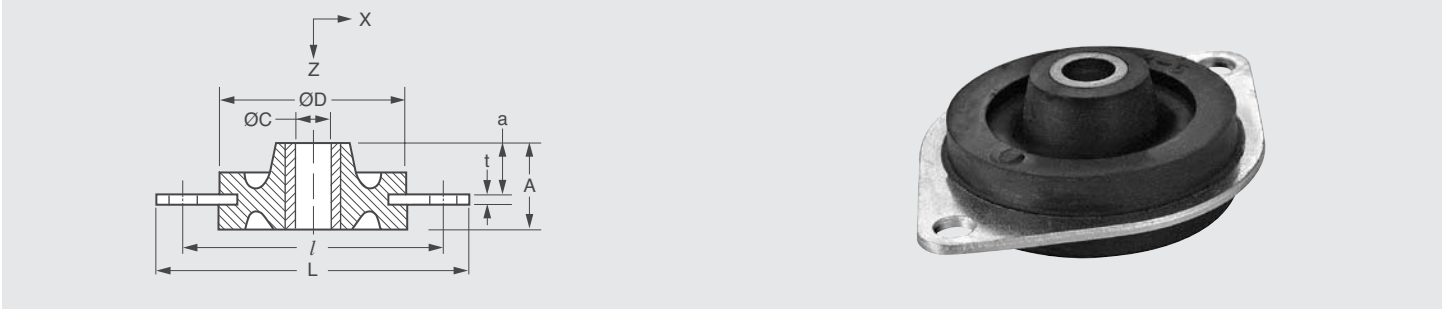

The projections shown are per ISO convention.

## Metric

### APPLICATIONS

- OFFICE MACHINES
- AIR CONDITIONERS
- SMALL GENERATORS

### FEATURES:

- Superior horizontal stability
- Neoprene is resistant to combustion and ozone

Catalog Number	A	D	DM	L	l	C	d	a
V11Z40MKP32	11 (.43)	25 (.98)	32 (1.26)	42 (1.65)	36 (1.42)	4.5 (.18)	3.6 (.14)	7 (.27)
V11Z40MKP42	16 (.63)	35 (1.38)	42 (1.65)	59 (2.32)	50 (1.97)	6.5 (.26)	4.8 (.19)	9.9 (.39)

Catalog Number	t	Load		Spring Rate in Z dir. Kz kgf/mm (lb./in.)	Stiffness Ratio Kx/Kz
		Support kgf (lbf)	Max. kgf (lbf)		
V11Z40MKP32	1 (.04)	2 (4.4)	2.5 (5.5)	1.9 (106.4)	2.2
V11Z40MKP42	1.6 (.06)	3.5 (7.7)	5 (11)	2.4 (134.4)	

NOTE: Dimensions in ( ) are inch.