




# Bumpers – Cylindrical Type

www.vibrationmounts.com Phone: 516.328.3662 Fax: 516.328.3365

- **MATERIAL:** Isolator – Natural Rubber  
Plate & Screw – Steel, Zinc Plated

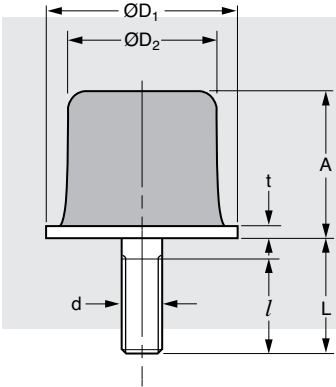

### FEATURES:

- Effective in neutralizing large shock loads. It allows soft impact with increasing bending and spring constant which results in the smooth absorption of a large impact force.
- Noise generation prevention; accepts a large load deformation with practically no friction. It does not generate noise at the instant of contact.
- Easy mounting. Simple to attach the unit with no need for maintenance.





Metric

Catalog Number	D <sub>1</sub>	D <sub>2</sub>	A	L	l	t	d	Max. Stroke	Max. Energy kgf·m (lb.ft.)	Max. Impact Load kgf X 10 <sup>3</sup> (lb. X 10 <sup>3</sup> )
V11Z07MK030	30 (1.18)	25 (.98)	30 (1.18)	24 (.94)	20 (.79)	2.3 (.09)	M8	14 (.55)	1.8 (13)	.5 (1.1)
V11Z07MK040	40 (1.57)	35 (1.38)	35 (1.38)	30 (1.18)	25 (.98)			17 (.67)	4.5 (32.5)	1.1 (2.4)
V11Z07MK050	50 (1.97)	40 (1.57)	40 (1.57)			3.2 (.13)	35 (1.38)	35 (1.38)	M10	19 (.75)
V11Z07MK060	60 (2.36)	50 (1.97)	50 (1.97)	M12	24 (.94)				14 (101.3)	2.3 (5.1)
V11Z07MK080	80 (3.15)	65 (2.56)	65 (2.56)	45 (1.77)	45 (1.77)				30 (1.18)	30 (217)
V11Z07MK100	100 (3.94)	80 (3.15)	85 (3.35)	55 (2.17)	55 (2.17)	4.5 (.18)	M16	40 (1.57)	60 (434)	5 (11)

NOTE: Dimensions in ( ) are inch.

### PERFORMANCE CHART

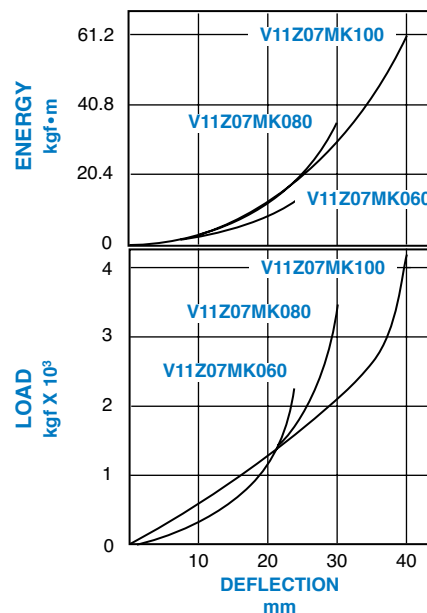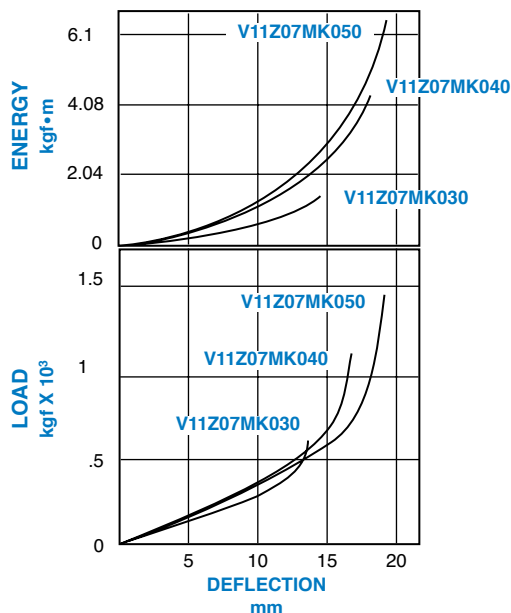

7  
Bumpers & Feet