



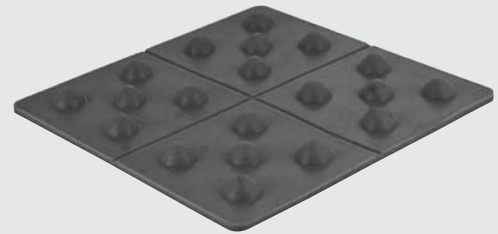

Silicone Gel Pads

www.vibrationmounts.com Phone: 516.328.3662 Fax: 516.328.3365

• **MATERIAL:** Silicone Gel

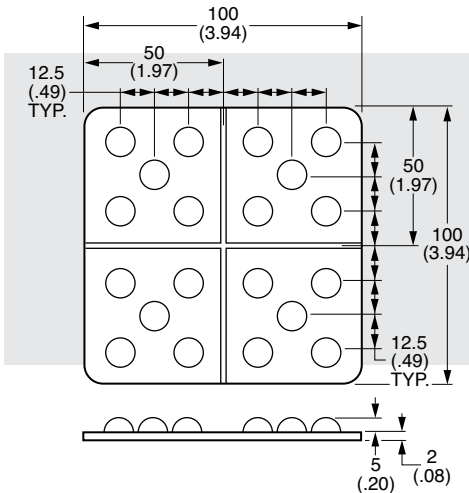

Metric


APPLICATIONS

- PRECISION SCIENTIFIC EQUIPMENT
- MOBILE MEASURING AND COMMUNICATION EQUIPMENT
- SMALL PUMPS AND COMPRESSORS

FEATURES:

- Simple installation suitable for light load applications.
- Depending on the load, the characteristic changes leading to a stable performance.
- Effective vibration damping allows vibration to settle quickly.
- Superior resistance against cold, heat, chemicals and electricity – suitable resistance in many environments.

PERFORMANCE CHART

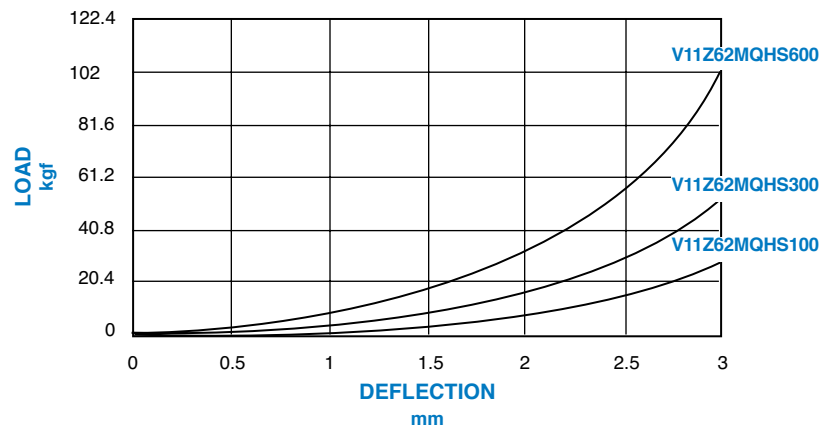

NOTE: Dimensions in () are inch.

TEMPERATURE RANGE: -40°C to +200°C (-40°F to +392°F)

Catalog Number	Color Code	Load kgf (lb.)	Max. Load kgf (lb.)	Frequency Hz
V11Z62MQHS100	Black	4 to 10 (8.8 to 22)	13 (28.7)	27
V11Z62MQHS300	Gray	10 to 30 (22 to 66.1)	40 (88.2)	
V11Z62MQHS600	Green	30 to 60 (66.1 to 132.3)	80 (176.4)	