




Rubber Fasteners

www.vibrationmounts.com Phone: 516.328.3662 Fax: 516.328.3365

- **MATERIAL:** Isolator – EPDM Rubber
Nut – Brass

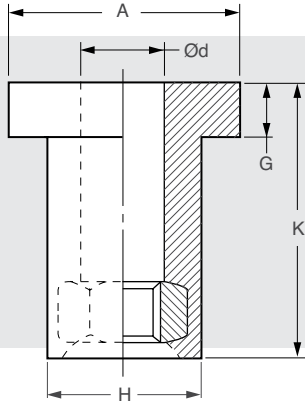


Metric

FEATURES:


- Absorbs vibration and shocks; reduces noise generation
- Simple installation, can be installed from one side with a driver
- Improves efficiency of assembly
- Has the effect of sealing liquid or gas

INSTALLATION EXAMPLES:


Fasten to a Plate with a Hole



Fasten for Vibration Isolation



Fasten to a Blind Hole



Catalog Number	A	d	G	H	K	Thread Size	Weight g (oz.)
V11Z41MKT03	9 (.35)	3.5 (.14)	2.5 (.10)	7 (.28)	11.5 (.45)	M3 x 0.5	0.76 (.027)
V11Z41MKT04	12 (.47)	4.5 (.18)	3 (.12)	9 (.35)	14.5 (.57)	M4 x 0.7	1.62 (.057)
V11Z41MKT05	15 (.59)	5.5 (.22)	3.5 (.14)	10 (.39)	18 (.71)	M5 x 0.8	2.5 (.088)
V11Z41MKT06	18 (.71)	6.5 (.26)	4 (.16)	12.5 (.49)	21 (.83)	M6 x 1	4.7 (.166)
V11Z41MKT08	24 (.94)	8.5 (.33)	5 (.20)	16 (.63)	27 (1.06)	M8 x 1.25	10.1 (.356)

NOTE: Dimensions in () are inch.